




電纜接頭
Nylon Cable
Gland

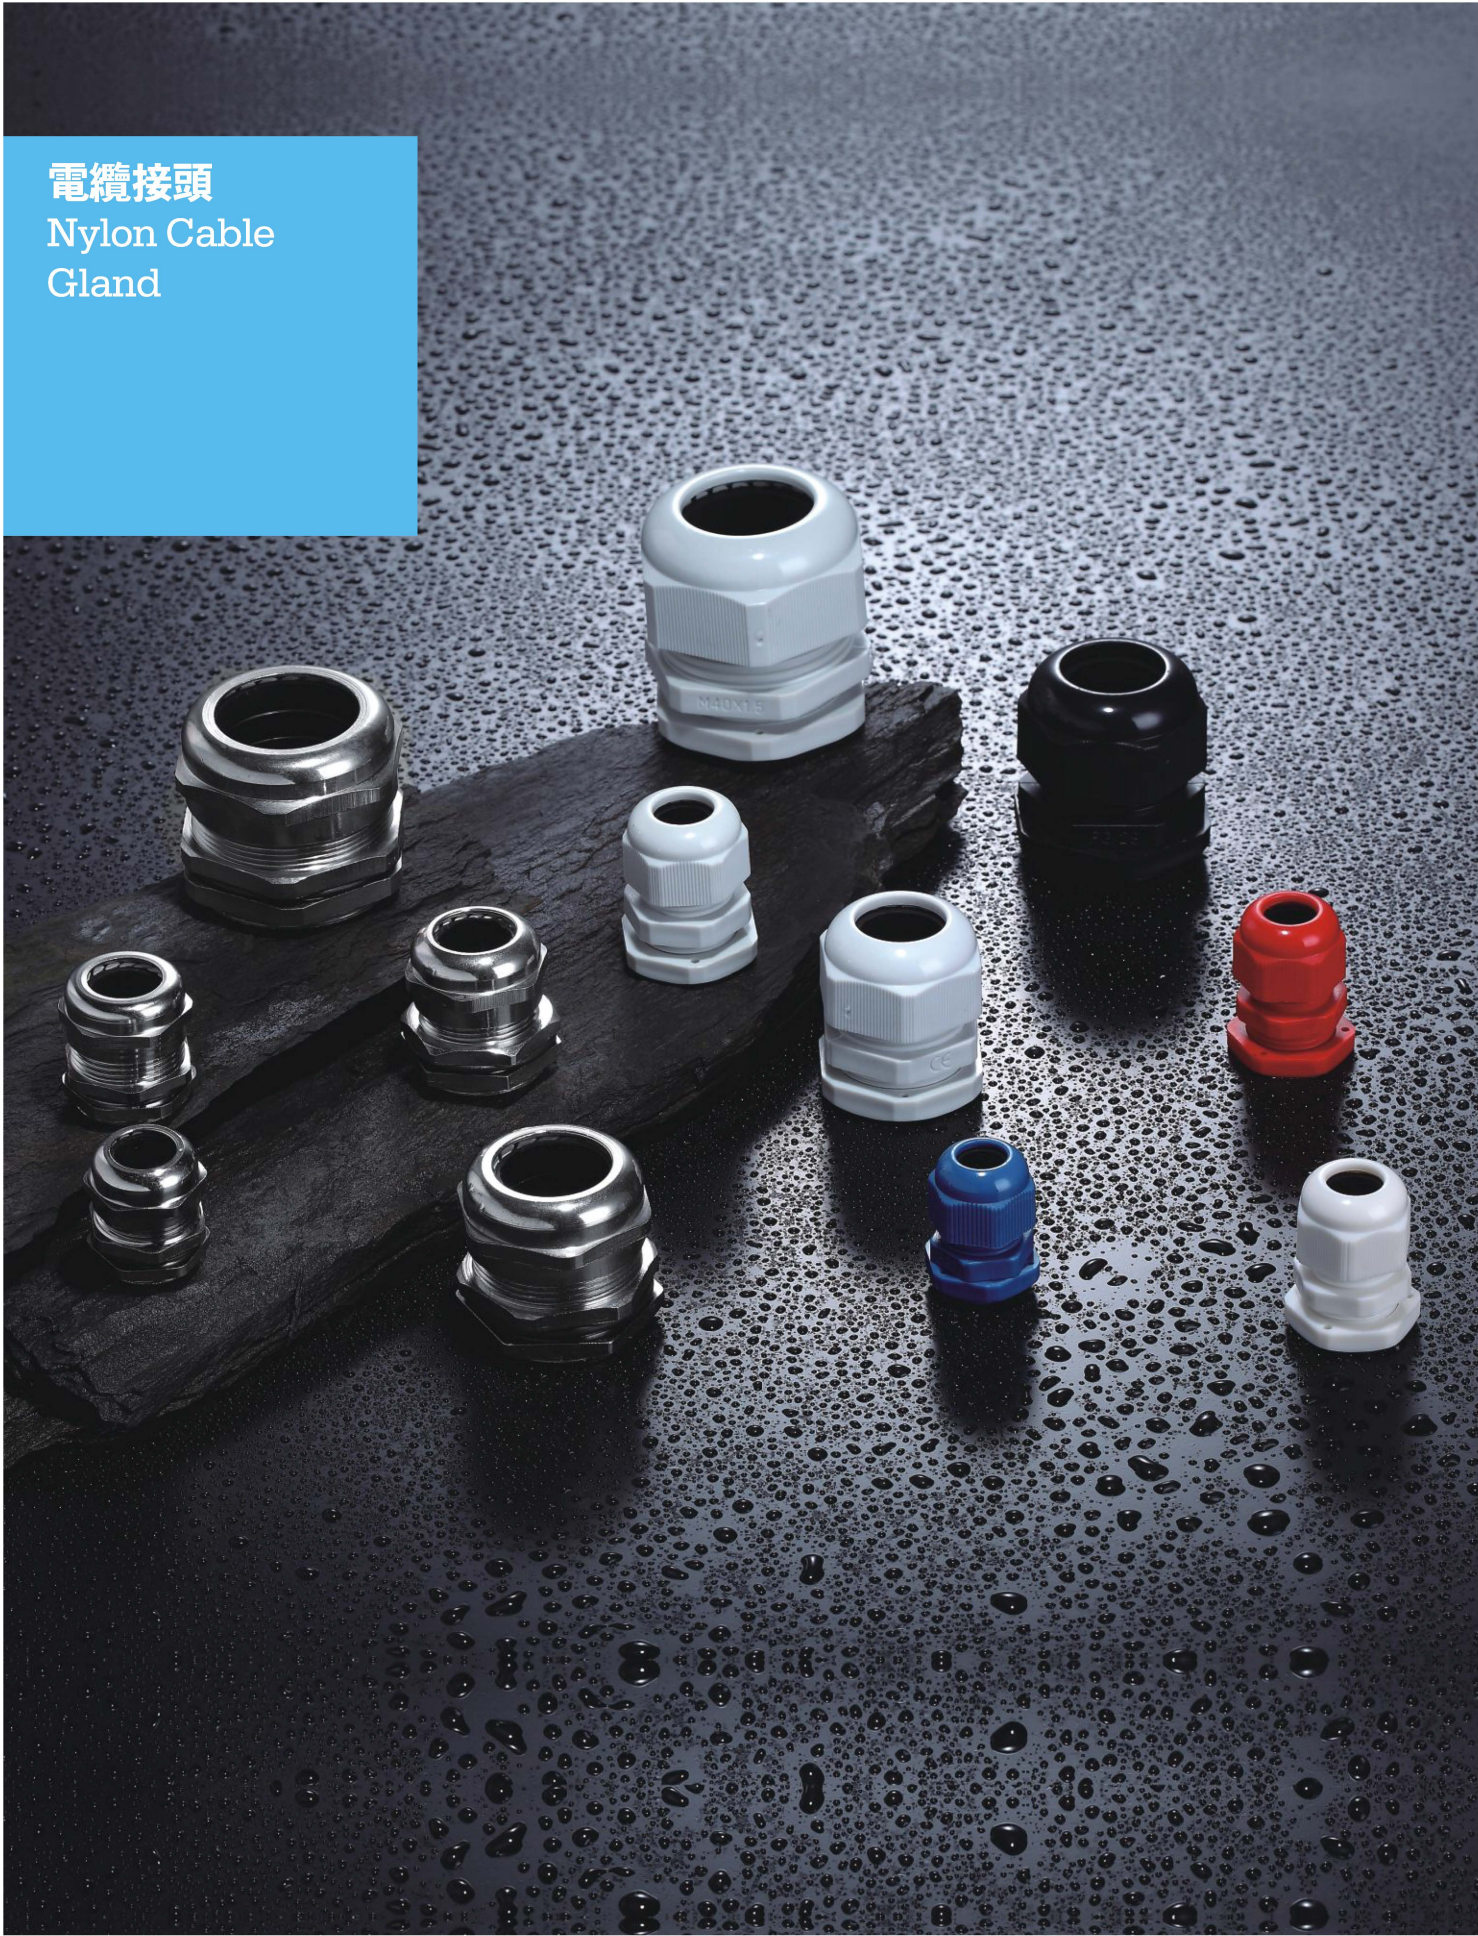


LAMAN

Nylon Cable Gland

Nylon Cable Gland PG Type


- Material: nylon plastic
- Hermetic seal: nitrile rubber
- Protection degree: IP68-10pressure (rotate position, with o-seal)
- Ambient temperature: quiescent state-40°C to 100°C , short time to 120°C ,dynamic-20°C to 80°C ,short time to 100°C
- Supply color: Grey、Black、 Other color, please inquiring

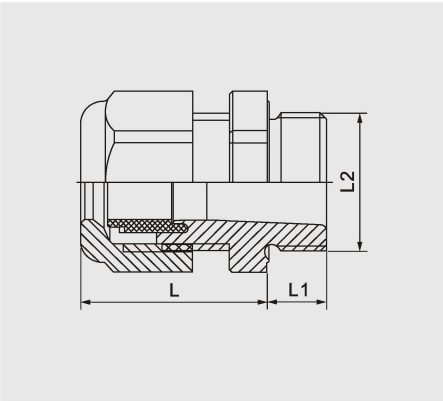

ITEM NO .	￠mm	L2 mm	L1 mm	L mm	￠mm
PG7	3-6.5	12	9	22	16
PG7	2-5	12	9	22	16
PG9	4-8	15.5	9	24	18
PG9	2-6	15.5	9	24	18
PG11	5-10	18	9	26	23
PG11	3-7	18	9	26	23
PG13.5	6-11	20.5	9	28	23
PG13.5	5-9	20.5	9	28	23
PG16	10-13	22.5	10	30	27
PG16	7-12	22.5	10	30	27
PG19	12-15	24	10	30	27
PG19	10-12	24	10	30	27
PG21	13-18	28	12	34	33
PG21	9-16	28	12	34	33
PG25	16-21	30	12	36	35
PG25	13-18	30	12	36	35
PG29	18-25	36	12	38	42
PG29	13-20	36	12	38	42
PG36	22-32	45.5	15	42	52
PG36	20-26	45.5	15	42	52
PG42	32-38	49.5	18	46	58
PG42	25-31	49.5	18	46	58
PG48	37-44	58	18	50	64
PG48	29-35	58	18	50	64
PG63	42-50	-	27	60	72

Nylon Cable Gland M Type


- Material: nylon plastic
- Hermetic seal: nitrile rubber
- Protection degree: IP68-10pressure (rotate position, with o-seal)
- Ambient temperature: quiescent state-40°C to 100°C , short time to 120°C ,dynamic-20°C to 80°C ,short time to 100°C
- Supply color: Grey、Black、 Other color, please inquiring

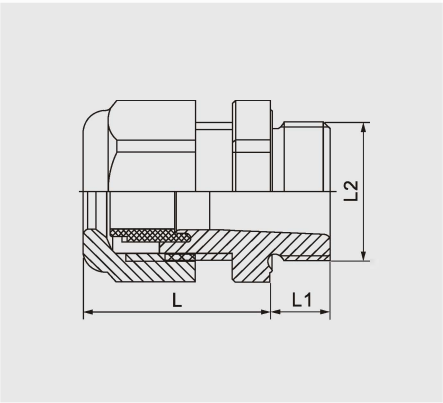

ITEM NO .	Ø mm	L2 mm	L1 mm	L mm	mm
M12×1.5	3-6.5	12	9	22	16
M12×1.5	2-5	12	9	22	16
M16×1.5	4-8	16	9	24	18
M16×1.5	2-6	16	9	24	18
M18×1.5	5-10	18	9	26	23
M18×1.5	3-7	18	9	26	23
M20×1.5	6-11	20	9	28	23
M20×1.5	5-9	20	9	28	23
M22×1.5	10-13	22	10	30	27
M22×1.5	7-12	22	10	30	27
M24×1.5	12-15	24	10	30	27
M24×1.5	10-12	24	10	30	27
M25×1.5	13-18	25	12	34	33
M25×1.5	9-16	25	12	34	33
M27×1.5	13-18	27	12	34	33
M27×1.5	9-16	27	12	34	33
M28×1.5	13-18	28	12	34	33
M28×1.5	9-16	28	12	34	33
M30×1.5	16-21	30	12	36	35
M30×1.5	13-18	30	12	36	35
M32×1.5	16-21	32	11	34	36
M32×1.5	13-18	32	11	34	36
M36×1.5	18-25	36	12	38	42
M36×1.5	13-20	36	12	38	42
M40×1.5	22-32	40	15	42	53
M40×1.5	20-26	40	15	42	53
M46×1.5	22-32	46	15	42	52
M46×1.5	20-26	46	15	42	52
M50×1.5	32-38	50	18	46	58
M50×1.5	25-31	50	18	46	58
M58×1.5	37-44	58	18	50	64
M58×1.5	29-35	58	18	50	64
M63×1.5	37-44	63	18	50	65
M63×1.5	29-35	63	18	50	65

Nylon Cable Gland MG Type


- Plastic cable pack MG
- Material: nylon plastic
- Hermetic seal: nitrile rubber
- Protection degree: IP68-10pressure (rotate position, with o-seal)
- Ambient temperature: quiescent state-40°C to 100°C , short time to 120°C ,dynamic-20°C to 80°C ,short time to 100°C
- Supply color: Grey、Black、 Other color, please inquiring

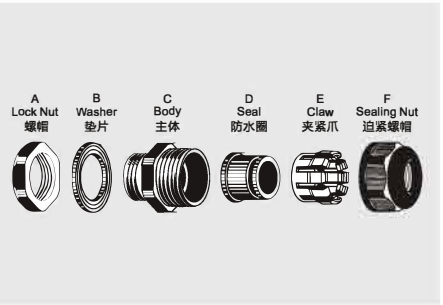

ITEM NO .	Ø mm	C1 mm	C2 mm	mm
MG12A	3-5.3	12	9	17/19
MG12A	4.5-8	12	9	17/19
MG16A	4-7	16	15	22
MG16A	6-10	16	15	22
MG20A	6-11	20	15	26/27
MG20A	9-14	20	15	26/27
MG25A	10-16	25	15	32/33
MG25A	13-18	25	15	32/33
MG32A	15-22	32	15	41
MG32A	18-25	32	15	41
MG40A	20-25	40	20	50
MG40A	24-30	40	20	50
MG50A	26-32	50	23	60/62
MG50A	30-40	50	23	60/62
MG63A	38-46	63	24	73/75
MG63A	40-50	63	24	73/75

Nylon Cable Gland MG Type

- Plastic cable pack NPT
- Material: nylon plastic
- Hermetic seal: nitrile rubber
- Protection degree: IP68-10pressure (rotate position, with o-seal)
- Ambient temperature: quiescent state-40°C to 100°C , short time to 120°C ,dynamic-20°C to 80°C ,short time to 100°C
- Supply color: Grey、Black、 Other color, please inquiring

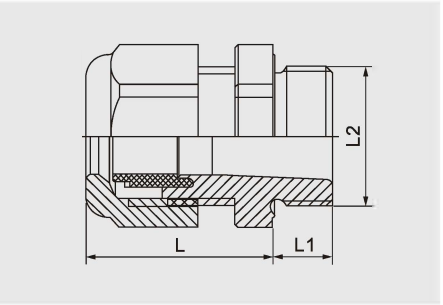

ITEM NO .	Ø mm	L2 mm	L1 mm	L mm	mm
3/8"NPT	4-8	15.5	15	24	18
3/8"NPT	2-6	15.5	15	24	18
1/2"NPT	6-11	20.5	15	28	23
1/2"NPT	5-9	20.5	15	28	23
3/4"NPT	13-18	28	15	34	33
3/4"NPT	9-16	28	15	34	33
1"NPT	18-25	36	15	38	42
1"NPT	13-20	36	15	38	42
NPT1 1/4	22-32	45.5	18	42	52
NPT1 1/4	20-26	45.5	18	42	52